




## Soundproofing Underlay

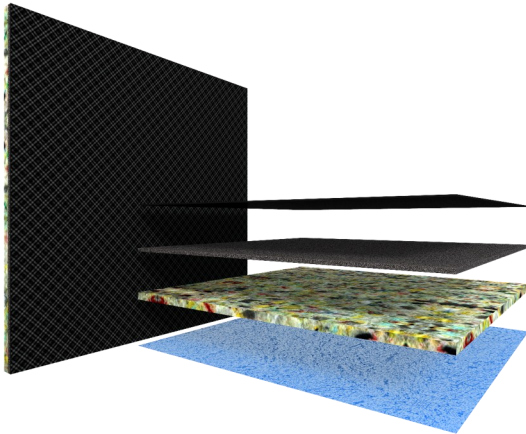

**Silentstep®** is a new generation of acoustic carpet underlay, comprising a flexible mass-loaded barrier, fused onto a high density premium foam underlay. The combination of these two products allows **Silentstep** to reduce the transmission of footfall and impact-generated noise.

**Silentstep** was developed to meet market noise reduction requirements in multi-storey living, commercial, automotive and marine markets.

Easy to cut and lay, it offers excellent support and a firm cushioned base for all types of carpet applications. It is ideally suited for lightweight flooring constructions such as timber and marine applications where fibreglass and composite floor panels are used.

When laying carpet over a floor constructed using lightweight timber and joists, typical standard underlay offers little effect in reducing the transmission of footfall and impact noise.

**Silentstep** isolates the barrier layer from the floor structure, increasing the performance of the floor system between two rooms. This feature means that critical frequencies generated during speech and electronic audio technologies such as radio and television etc can be reduced.

**Silentstep** products are environmentally safe, contain no ozone-depleting substances and comply with European and Australian standards for Volatile Organic Compound emissions.

### FEATURES

- Bonded foam is made from 100% recycled material
- No ozone-depleting substances are generated during manufacture
- Free from lead, odour-producing oils and bitumen
- Easily installed by quality carpet layers. No special tools or fixtures required
- Uses specially made, high density, high rebound bonded foam as the impact layer
- Long service life, will not degrade like rubber underlay
- Foam is treated with Ultra-Fresh® to resist mould, mildew, bacterial growth and dust mites
- Available in roll or sheet form, or custom made to suit (minimum order quantities apply)
- Standard barrier weight 4kg/m<sup>2</sup> Other weights available on request, subject to minimum order quantities


### APPLICATIONS

- Multi-storey living areas constructed from lightweight materials with the intention to lay carpet
- Placed under solid timber or parquet flooring using Pyrotek's flooring systems - contact your local Pyrotek Representative
- Marine vessels to stop engine noise travelling into staterooms, salons, VIP cabins etc
- Transport industry; under automotive, firewalls, wheel arches, boot mats, and transmission tunnels
- Motor homes and luxury motor coaches

Refer to our website [www.pyroteknc.com](http://www.pyroteknc.com) to check you have the latest information page

## IMPACT NOISE REDUCTION


(Tested at CSIRO INSS 21031 - Rev B to ISO 140/7)

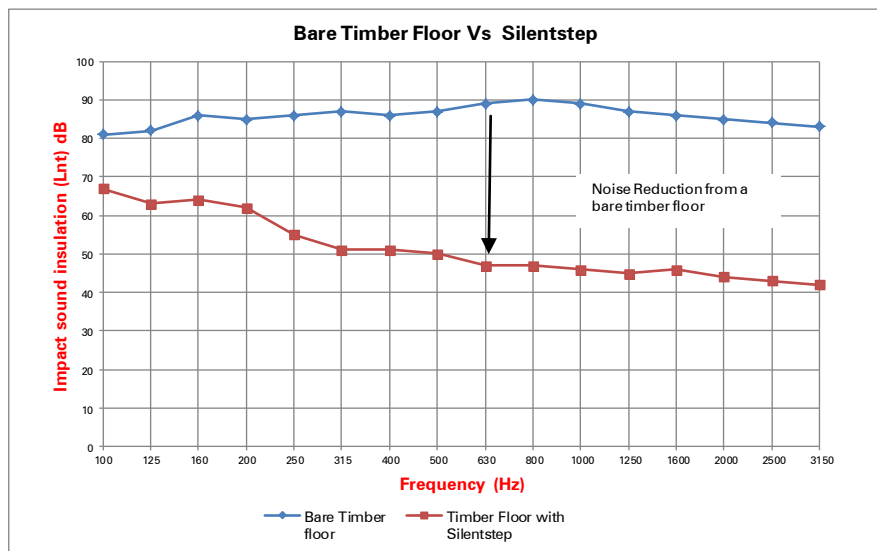

Frequency (Hz)	Bare timber floor	Timber Floor with Silentstep
100	81	67
125	82	63
160	86	64
200	85	62
250	86	55
315	87	51
400	86	51
500	87	50
630	89	47
800	89	47
1000	87	46
1250	87	45
1600	86	46
2000	85	44
2500	84	43
3150	83	42

## TRANSMISSION LOSS

(Tested to ISO 15186-1/ISO 10140-4 (Report No. 188))

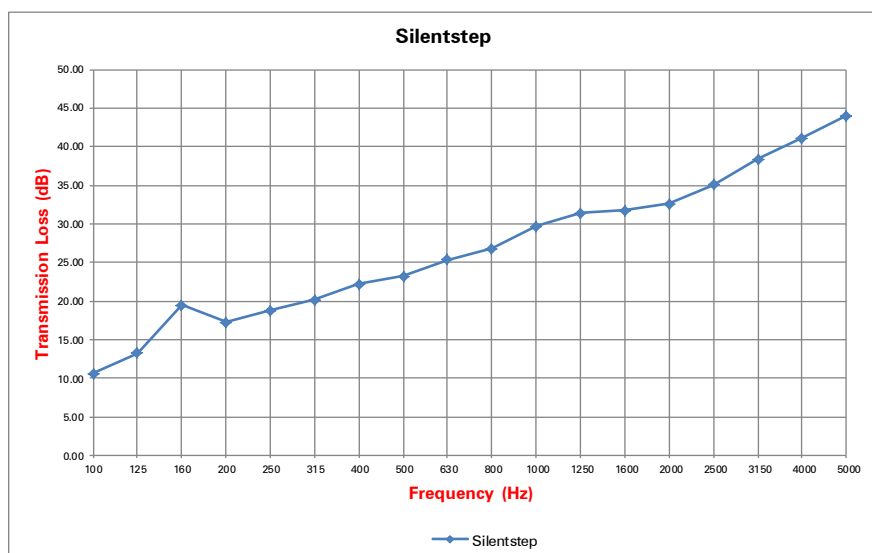

Frequency (Hz)	Silentstep
100	10.58
125	13.21
160	19.47
200	17.24
250	18.82
315	20.19
400	22.20
500	23.24
630	25.36
800	26.79
1000	29.69
1250	31.41
1600	31.79
2000	32.62
2500	35.10
3150	38.41
4000	41.12
5000	44.04
<b>STC/Rw</b>	<b>28</b>

## PRODUCT SPECIFICATIONS

COMPOSITE WEIGHT (kg/m <sup>2</sup> )	THICKNESS (mm)	ROLL WIDTH (mm)	ROLL LENGTH (Lineal Metres)	ROLL WEIGHT (kg)	FLAMMABILITY PROPERTIES (FMVSS-302)	OPERATING TEMPERATURE RANGE (°C)
5	9	1350	5	34	Self Extinguishing	-40 to 100 (Continuous) -40 to 120 (Intermittent)

Tolerances: Length: -0/+50mm; Width: -0/+5mm; Thickness: +/- 2mm; Weight: +/- 5%

## ACOUSTIC PROPERTIES

L <sub>n,r</sub> T <sub>w</sub> + C <sub>1</sub>	L <sub>n,w</sub>	IIC	Rw	AAAC rating
56	56	54	28	4 Star

Caveats: Specifications are subject to change without notice. The data in this document are typical of average values based on tests by independent laboratories or by the manufacturer and are indicative only. Materials must be tested under intended service conditions to determine their suitability for purpose. The conclusions drawn from acoustic test results are as interpreted by qualified independent testing authorities. Nothing here releases the purchaser/user from responsibility to determine the suitability of the product for their project needs. Always seek the opinion of your acoustic or mechanical engineer on data presented by the manufacturer. Due to the wide variety of individual projects, Pyrotek NC is not responsible for differing outcomes from using their products. Pyrotek disclaims any liability for damages or consequential loss as a result of reliance solely on the information presented. No warranty is made that the use of this information or of the products, processes or equipment to which this Information Page refers will not infringe any third party's patents or rights. DISCLAIMER: This document is covered by Pyrotek standard Disclaimer, Warranty and © Copyright clauses. See [www.pyroteknc.com/disclaimer](http://www.pyroteknc.com/disclaimer).

<b>AUSTRALIA</b> 1300 928 322 (1300 WAVEBAR) +61(0)2 8868 2088	<b>CHINA</b> +86(0)755 8601 6449 <b>HONG KONG</b> +852 2548 4443	<b>CZECH REPUBLIC</b> +420 516 527 195 +420 725 373 966	<b>DUBAI</b> +971 (50) 624 9254 <b>INDIA</b> +91 9819 330 499 +91 2137 668 000	<b>NEW ZEALAND</b> 0800 226 878 427 (0800 ACOUSTICS) +64(0)9 272 2056	<b>TAIWAN</b> +886 6 313 1267 <b>INDONESIA</b> +62 81 1889 1917	<b>UNITED KINGDOM</b> +44(0)1908 561155 <b>TURKEY</b> +90 212 230 3033	<b>USA</b> +1 509 991 8548 +1 856 816 0194
---	---	---	--	--	--	---	--



[www.pyroteknc.com](http://www.pyroteknc.com)

**Pyrotek**  
noise control