



Damped Noise Barrier



Subdue® M is a multi-layered damped noise barrier panel constructed from two outer layers of marine grade Okoume ply, compliant to **BS 1088**, with inner core comprising a damped viscoelastic layer. The inner core is thin, dense and made from a specially developed polymer with superior damping properties to improve transmission loss and reduce structure borne noise. These properties make **Subdue M** a slimmer and higher performing composite panel over **Subdue L**. The product is suited to medium privacy areas such as areas adjoining engine rooms, VIP rooms, master state rooms. It's typically used in interior applications such as lightweight wall, ceiling and floor construction and in marine, commercial and rail construction.

The '**M**' category of '**Subdue**' panels includes inner cores with densities from 1000kg/m³ up to 2000kg/m³.

Coincidence dip is a common phenomenon in lightweight panels, that adversely impacts the sound transmission loss performance in materials such as timber, plywood, sheet metal, low density rigid foams and hollow core walls. However, **Subdue's** unique multi layered composition with its inner core layer, shifts the coincidence dip to frequencies limiting its impact, thereby maintaining the performance of panels. **Subdue M** works by reflecting, absorbing and damping the vibration and transmission of sound through walls, ceilings and floors, reducing the critical frequencies generated from mechanical equipment, engine noise and electronic audio devices.

Pyrotek endorses forest sustainability and the preservation of natural environment. We procure highest quality materials from suppliers who hold FSC Certification (Forest Stewardship Council) and PEFC (Programme for the Endorsement of Forestry Certification) amongst other certification programmes.

Subdue 'Okoume' ply is tested to **AS/NZS 2098.11** and classifies as '**E-0**' for low Formaldehyde emission.

FEATURES

- Available in a range of lightweight marine grade plywood, tested to BS1088
- Tested to **EN717-2** and **AS/NZS 2098.11** for low Formaldehyde emission
- All panels have been tested to provide differing acoustic properties to suit differing designs
- Simple to saw-cut, fabricate and install using conventional woodworking tools
- Tested and proven to have superior damping properties over standard plywood and similar panels
- Thin and lightweight panels whilst still possessing high noise reduction properties
- Bonded using water resistant glues, Weather and Boil Proof (WBP) tested, according to BS1088
- Available in preformed cut panels and varying constructions (offering weight savings) to suit differing designs
- **Subdue M**: Product category with core layer densities ranging from 1000 up to 2000kg/m³

APPLICATIONS

- Used to construct floor, partition walls and lining panels
- Particularly suited for medium privacy areas such as VIP rooms and master state rooms
- Extensively specified for interior marine construction e.g. bulkheads, cabin partitions, floating floors
- Flooring systems in the rail and motor coach industry to reduce road and track noise
- Used in the audio industry to construct high quality speaker enclosures
- Fabrication of acoustic doors
- Used in conjunction with an isolation mount to create floating wall, floor and ceiling systems


(Please refer to Information pages '325P' and '335IP' for choice of ply)

PRODUCT SPECIFICATIONS

SERIES	PRODUCT CODE	TOTAL THICKNESS (mm)	PANEL CONSTRUCTION Ply / Core / Ply (mm)	TOTAL WEIGHT (kg/m ²)	¹ FLEXURAL STRENGTH (Mpa)	² DECAY RATE (dB/s)	SHEET SIZES (mm X mm)
SUBDUE M	M10/1500	10	4/2/4	7.0	42.0	622	2440 X 1220 (Untrimmed)* 1200 x 2400 (Trimmed)
	M14/1500	14	6/2/6	8.3	43.5	1458	
	M20/1500	20	9/2/9	12.5	46.9	2070	


Tolerances: Dimensions +5%; Weight: +/- 10%; *Untrimmed means some layers may overhang the usable width. Other grades of plywood can be used upon request.
¹ Report No 23611PH/PH-1/PH-2; ² Report No 32911-MK.

Product Code Nomenclature:

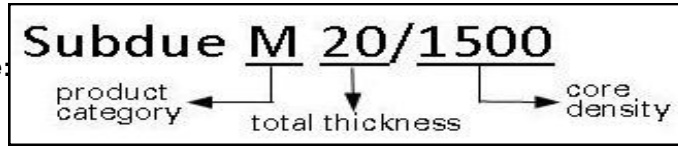


TRANSMISSION LOSS

(Tested to ISO 15186-1/ISO 10140-4 Report date 07/09/2011)

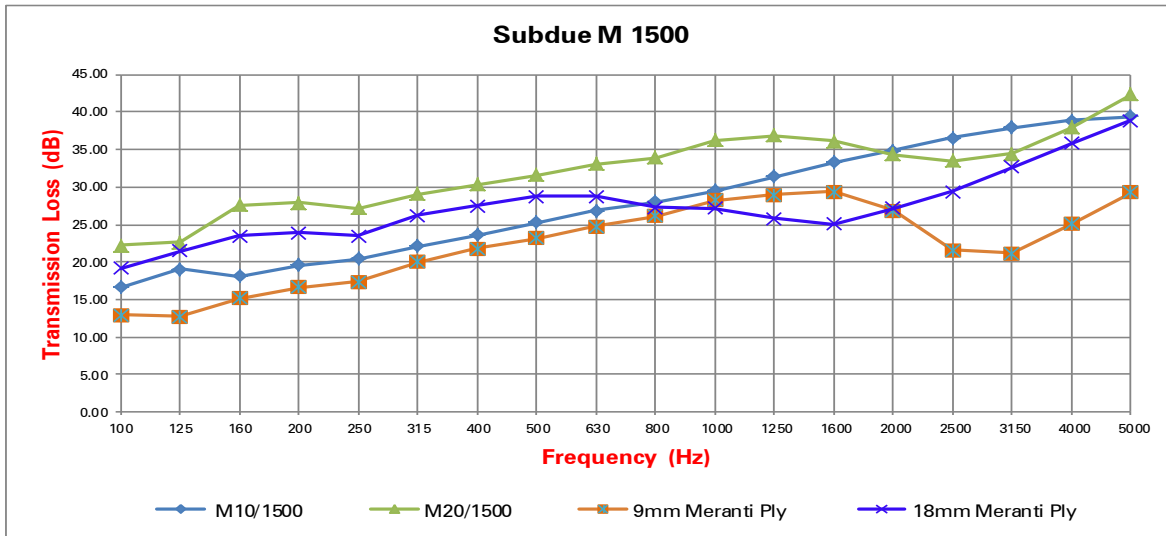

Frequency (Hz)	100	125	160	200	250	315	400	500	630	800	1000	1250	1600	2000	2500	3150	4000	5000
9mm Ply	12.90	12.70	15.10	16.60	17.30	20.00	21.80	23.20	24.70	26.10	28.20	29.00	29.40	26.80	21.60	21.20	25.10	29.30
18mm Ply	19.10	21.50	23.50	23.90	23.50	26.20	27.50	28.70	28.70	27.30	27.20	25.80	25.10	27.20	29.40	32.70	35.80	38.90
M10/1500	16.60	19.00	18.10	19.60	20.40	22.10	23.60	25.30	26.90	28.00	29.50	31.40	33.30	34.90	36.60	37.90	38.90	39.40
M20/1500	22.24	22.68	27.61	27.86	27.17	29.02	30.38	31.64	33.09	33.96	36.25	36.87	36.12	34.36	33.46	34.44	37.89	42.34

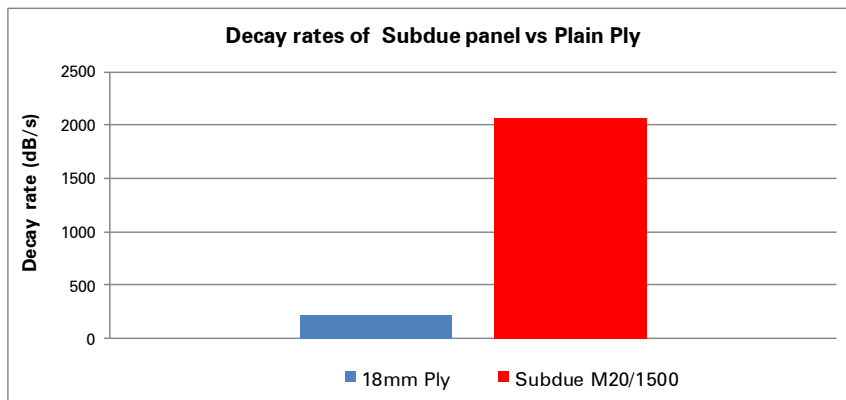

Caveats: Specifications are subject to change without notice. The data in this document are typical of average values based on tests by independent laboratories or by the manufacturer and are indicative only. Materials must be tested under intended service conditions to determine their suitability for purpose. The conclusions drawn from acoustic test results are as interpreted by qualified independent testing authorities. Nothing here releases the purchaser/user from responsibility to determine the suitability of the product for their project needs. Always seek the opinion of your acoustic or mechanical engineer on data presented by the manufacturer. Due to the wide variety of individual projects, Pyrotek NC is not responsible for differing outcomes from using their products. Pyrotek disclaims any liability for damages or consequential loss as a result of reliance solely on the information presented. No warranty is made that the use of this information or of the products, processes or equipment to which this Information Page refers will not infringe any third party's patents or rights. DISCLAIMER: This document is covered by Pyrotek standard Disclaimer, Warranty and © Copyright clauses. See www.pyroteknc.com/disclaimer.

AUSTRALIA 1300 928 322 (1300 WAVEBAR) +61(0)2 8868 2088	CHINA +86(0)755 8601 6449 HONG KONG +852 2548 4443	CZECH REPUBLIC +420 516 527 195 +420 725 373 966	DUBAI (50) 624 9254 INDIA +91 9819 330 499 +91 2137 668 000	NEW ZEALAND 0800 226 878 427 (0800 ACOUSTICS) +64(0)9 272 2056	TAIWAN +886 6 313 1267 INDONESIA +62 81 1889 1917	UNITED KINGDOM +44(0)1908 561155 TURKEY +90 212 230 3033	USA +1 509 991 8548 +1 856 816 0194
---	---	---	---	--	--	---	--



Subdue M
Page 2 of 2

www.pyroteknc.com

Pyrotek
noise control