



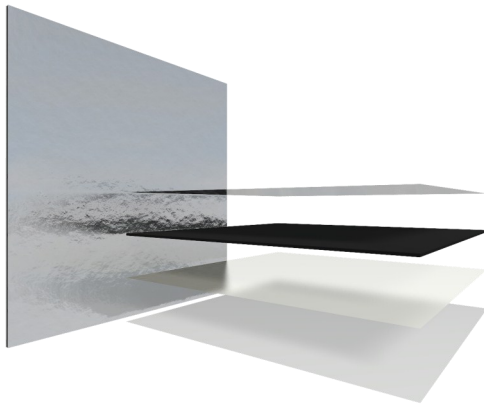

Constrained Layer Vibration Damping Pad



Vibradamp® CLD is a constrained layer, visco-elastic damping material, designed to reduce structural vibration and sound transmission within light gauge materials. **CLD** was developed to meet market noise reduction requirements in the automotive, marine, industrial and OEM markets.

To achieve this high performance, the Pyrotek engineering team developed a product that thermally bonds three layers; a rigid outer metal layer, a visco-elastic membrane and a high-tack adhesive layer, hence the name **CLD** (Constrained Layer Damping).

Vibration is reduced by allowing the visco-elastic layer to flex, which creates shear strains between two rigid substrates, hence noise-creating energy is lost.

Lightweight panel constructions such as sheet metal (steel, alloy, tin etc.) and rigid plastics (ABS and FRP etc.) easily transmit noise when affected by natural resonance from vibration energies.

By applying **CLD** to rigid lightweight structures, the natural frequency of the vibrating surface is changed, lowering radiated noise (vibration), and increasing the transmission loss of the product.

Vibradamp materials are environmentally safe, contain no ozone-depleting substances and comply with European and Australian standards for Volatile Organic Compound emissions.

FEATURES

- No ozone-depleting substances are generated during manufacture
- Free from lead, odour-producing oils and bitumen
- Performance across a broad temperature range
- Lightweight, only 75% surface coverage is required to obtain maximum results
- Easy to install, high-tack acrylic adhesive backing, simply peel and apply pressure to position
- Easily conforms to irregular surfaces without the use of heat guns
- Remains flexible, does not become brittle
- Complies with UL94 HF-1 , IMO 653.16 low spread of flame and British standards 476.6 / 7
- Resistant to weather and UV light
- Available in various weights, widths and roll lengths

APPLICATIONS

- Maximum performance achieved when applied to lightweight panels and steel substrates of up to 2mm, aluminium substrates up to 4mm and FRP (solid) up to 6mm thick
- Automotive floors, firewalls, doors, ceiling and boot panels
- Marine vessels: bulkheads, deckheads and hull construction
- Under metal deck roofs to reduce rain noise
- Generators, compressor covers and machine housing guards
- Metal air-conditioning ducts and compressor housings
- Laundry and garbage chutes, hoppers, lids and bins
- White goods and under sink bowls


Refer to our website www.pyroteknc.com to check you have the latest information page

PRODUCT SPECIFICATIONS

THICKNESS (mm)	SHEET SIZES (mm)	WEIGHT (Kg/m ²)	PEEL STRENGTH (180°/ Stainless Steel) (N/25mm) AFERA 4001	OPERATING TEMPERATURE RANGE (°C)
1.3	1000 X 1300 500 X 1300	2.5	>24	-10 to 100 (Continuous) -10 to 120 (Intermittent)

Tolerances: Length: -0/+50mm; Width: -0/+5mm; Thickness: +/- 0.5mm; Weight: -0 /+10%

VIBRATION DAMPING PROPERTIES

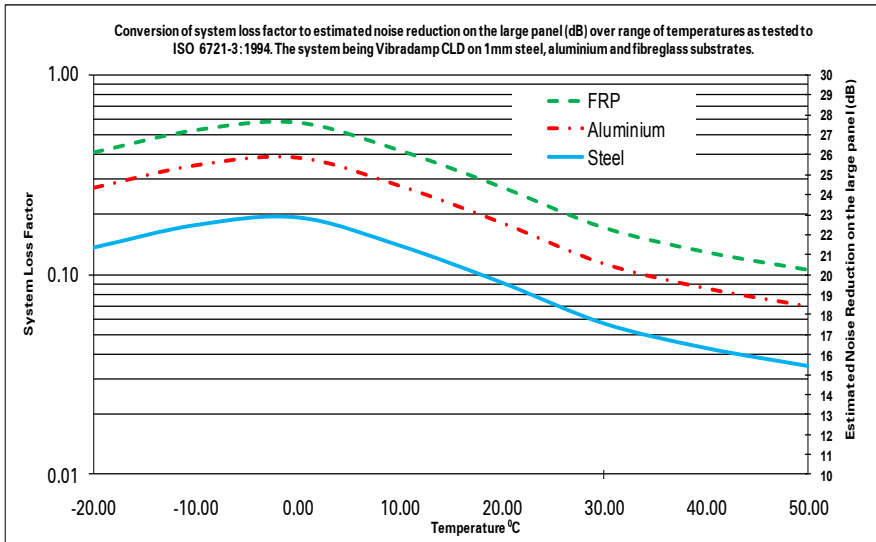

SYSTEM LOSS FACTOR FOR VIBRADAMP CLD ON 1MM SUBSTRATES			
Temperatures °C	Steel	Aluminium	FRP
-20	0.14	0.27	0.41
-10	0.18	0.35	0.53
0	0.19	0.38	0.58
10	0.14	0.28	0.42
20	0.09	0.18	0.27
30	0.06	0.11	0.17
40	0.04	0.09	0.13
50	0.04	0.07	0.11
Maximum estimated noise reduction (dB)	23.0	26.0	28.0

System loss factor is a dimensionless figure representing how well a particular system is damped. Standard ASTM E756-23/ISO 6721-3 is used to test for system loss factor. A system is a combination of the substrate, be it steel, aluminium or fibreglass and the damping material itself. System loss factor is system specific, hence the composition of the tested system needs to be provided.

FLAMMABILITY PROPERTIES

TEST METHOD	INDEX	RESULTS	DESCRIPTION
UL94	After flame time ≤ 2 seconds	HF-1	Horizontal burn test for foam materials.
FMVSS-302	Burn Rate - mm/min	Self Extinguishing	Automotive burn rate test.
IMO Res A 653(16) IMO Res MSC 61(67) Annex 1 Part 5 & Annex 2 IMO Res MSC 61(67) Annex 1 Part 2 & Annex 2 (Report No. 308442)	-	Complies for bulk-head, wall, ceiling and floor	Surface flammability.
EC Certificate (Certificate No. 164.112/1121/WCL MED0325TE)	-	Complies	EC Certificate of Type Examination96/98/EC Module B
BS476 part 6 : 1989+A1:2009 (Report No. 315528)	Fire Propagation Index	I = 1.3	Fire Propagation of products.
BS476 part 7: 1997 (Report No. 315529)	Class1 Class2 Class3	Class 1	Surface spread of flame.
Summary Report	UK Building Regulations	Class 0	Class 0 being the highest fire standard required by the British building code

Caveats: Specifications are subject to change without notice. The data in this document are typical of average values based on tests by independent laboratories or by the manufacturer and are indicative only. Materials must be tested under intended service conditions to determine their suitability for purpose. The conclusions drawn from acoustic test results are as interpreted by qualified independent testing authorities. Nothing here releases the purchaser/user from responsibility to determine the suitability of the product for their project needs. Always seek the opinion of your acoustic or mechanical engineer on data presented by the manufacturer. Due to the wide variety of individual projects, Pyrotek NC is not responsible for differing outcomes from using their products. Pyrotek disclaims any liability for damages or consequential loss as a result of reliance solely on the information presented. No warranty is made that the use of this information or of the products, processes or equipment to which this Information Page refers will not infringe any third party's patents or rights. DISCLAIMER: This document is covered by Pyrotek standard Disclaimer, Warranty and © Copyright clauses. See www.pyroteknc.com/disclaimer.

AUSTRALIA 1300 928 322 (1300 WAVEBAR) +61(0)2 8868 2088	CHINA +86(0)755 8601 6449 HONG KONG +852 2548 4443	CZECH REPUBLIC +420 516 527 195 +420 725 373 966	DUBAI +971 (50) 624 9254 INDIA +91 9819 330 499 +91 2137 668 000	NEW ZEALAND 0800 226 878 427 (0800 ACOUSTICS) +64(0)9 272 2056	TAIWAN +886 6 313 1267 INDONESIA +62 81 1889 1917	UNITED KINGDOM +44(0)1908 561155 TURKEY +90 212 230 3033	USA +1 509 991 8548 +1 856 816 0194
---	---	---	--	--	--	---	--



Vibradamp CLD

Page 2 of 2

www.pyroteknc.com

Pyrotek
noise control